


ELECTRIC BOLT

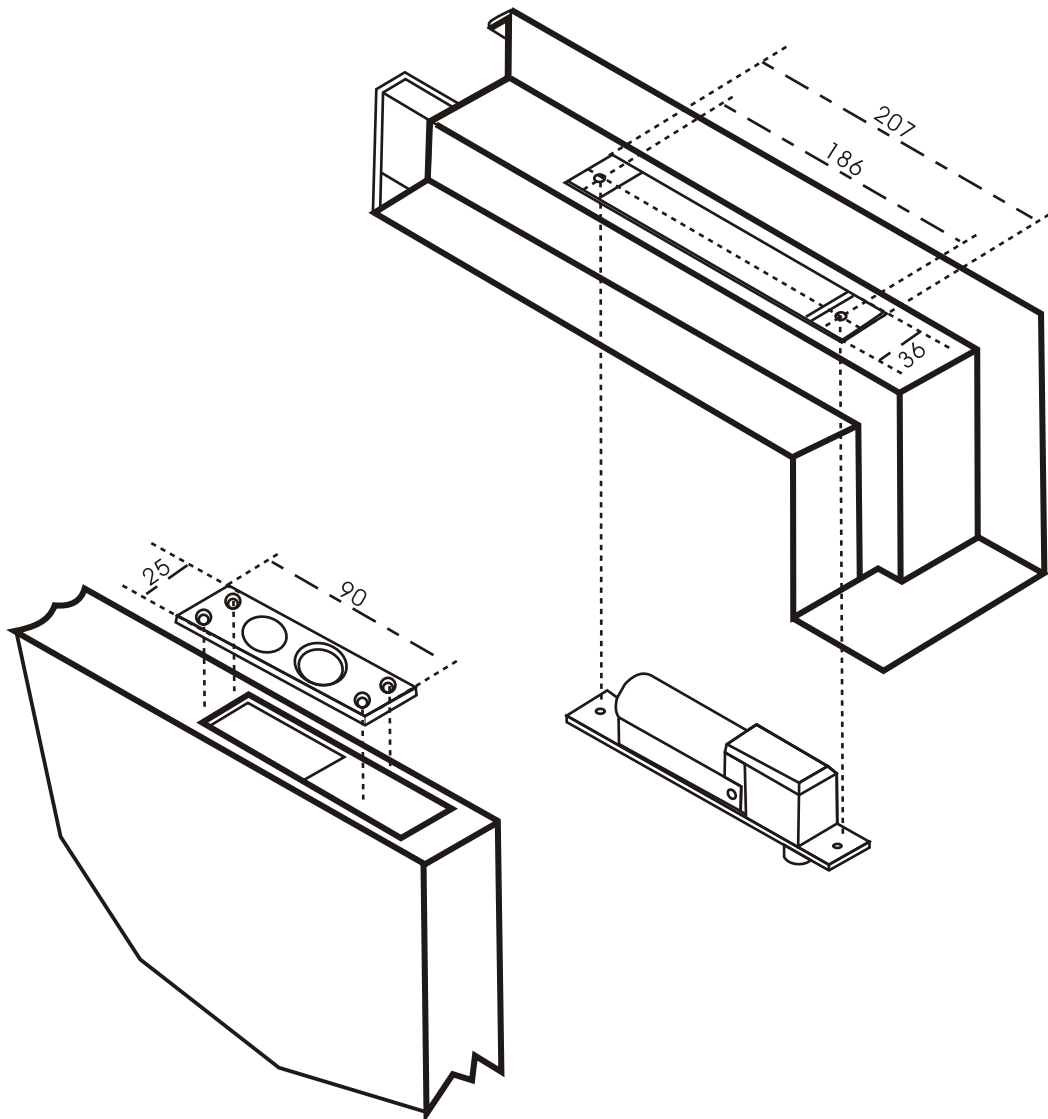

low temperature standard electric bolt

1. Specification:
standard voltage: 12VDC 1A
Red---Positive (+) Black---negative (-)
voltage: start 950mA. Standby 100mA.
solenoid: super low temperature continuous duty.
fail safe: locked when energized, power to locked, fail unlocked.
protecting designed:
Bolt dimension : 16mm DIA , stainless steel : 16mm throw.
cutout : 207mm(L)x36mm(W)(40mm back set minimum must be present)
cover plate : 215mm(L)x41mm(W)x0.5mm(D).
face plate : 205mm(L)x35mm(W)x3mm(D).
2. Signal status:
door status sensor: indicates the door is open or closed .
white wire : NC normally close.
note : the signal current/voltage through recon engine can not exceed 0.5AMP , 30VAC/DC.

The excellence of our electric bolt

1. excellent designed , solid and durable , 100% safe.
2. up to date design , super low use, continuously work.
3. low temperature design; more safe, credible, durable.
4. professional electrical locks, excellent manufacture.
5. authoritative attestation: MA, CE
6. high grade material, exquisite producing , warranty : 2 years.
7. products are popular in the world , and cooperate with great manufactures.

Installation Board Schematic

Below is the installation picture of five kinds of electric bolt please follow it to install

	A	B	C	D	E
YB-100	207	36	12	91	26
YB-200	207	36	12	91	26
YB-300	207	36	12	91	26
YB-500	207	36	12	101	36
YB-700	207	31	12	101	26

