

## PRODUCT FACE



## PRODUCT INTRODUCTION

This product named Photoelectric smoke detector(hereinafter called detector) detects the smoke by a couple of infrared diodes. The principle of detecting is granule in the smoke can reflect infrared light. Infrared diodes are placed in the special chamber. The chamber can shield external light, but doesn't affect the smoke into it. While there is no smoke, the diode can receive very weak infrared light. When the smoke entering the chamber, diode can receive more and more light, and the detector can give out alarm signal when the smoke attains the certain density. In order to reduce the interference and lower power consumption, the emitting circuit adopts the pulse signal. The product in accordance with the networking approach is divided into 2- wire and 4-wire detectors.

## TECHNICAL SPECIFICATION

| PRODUCT CATEGORY  | 2wire                       | 4wire                                 |
|-------------------|-----------------------------|---------------------------------------|
| OPERATING VOLTAGE | DC 9V~35V                   |                                       |
| STANDBY CURRENT   | 55uA                        | 500uA(relay N.O.)<br>12mA(relay N.C.) |
| ALARM CURRENT     | 35mA@DC12V<br>60mA@DC 24V   | 18mA(relay N.O.)<br>10mA(relay N.C.)  |
| ALARM INDICATION  | RED LED ON                  |                                       |
| TEMPERATURE RANGE | -10 ℃ ~ +50 ℃               |                                       |
| HUMIDITY          | 0%~95 % RH(NO CONDENSATION) |                                       |
| ALARM OUTPUT      | REMOTE LED                  | RELAY OUTPUT                          |
| CONTACT RATING    | N/A                         | 0.5A@DC28V                            |
| SENSITIVITY       | 0.5dB/m(± 0.1dB/m)          |                                       |
| STANDARD          | EN54-7/UL268                |                                       |
| DIMENSION         | 103 mm diameter*53mm deep   |                                       |


## CONNECTION DESCRIPTION

1. 2 wire smoke detectors :base terminals “1” and “2” for DC power input ,non-polarized. “1” for DC power positive pole or cathode input, “4” for DC power positive pole or cathode output. “3” for remote indicator cathode. When remote indicator is used “1” in must be connected to the positive line in .
2. 4 wire smoke detectors : base terminals “1” and “2” for DC power input ,non-polarized . “3” for relay output com, “4” for relay output N.C. or N.O.

## PRODUCT FEATURE


- STRONG ADAPTABILITY FOR CIRCUMSTANCE
- SMT DESIGN, HIGH STABILITY
- 9-35VDC WIDE VOLTAGE OPERATING RANGE
- LOW STANDBY CURRENT
- POWER SUPPLY NON-POLARIZED INPUT
- TWIN LED FOR 360 ° VISUAL
- FLASHING LED POWER INDICATOR
- REMOTE LED INDICATOR OUTPUT(2-WIRE)
- METAL SHIELD, ANTI-ELECTROMAGNETIC INTERFERENCE

## WIRING DIAGRAM

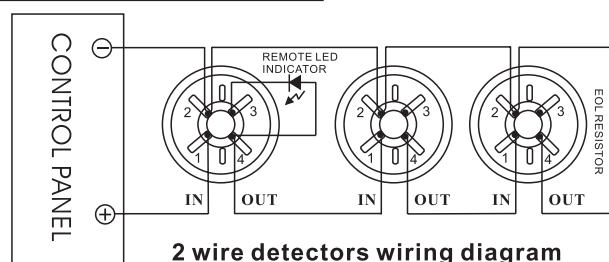

2 wire detectors wiring diagram

- 1 POWER(+)IN
- 2 POWER(-)
- 3 REMOTE LED(-)
- 4 POWER(+)OUT

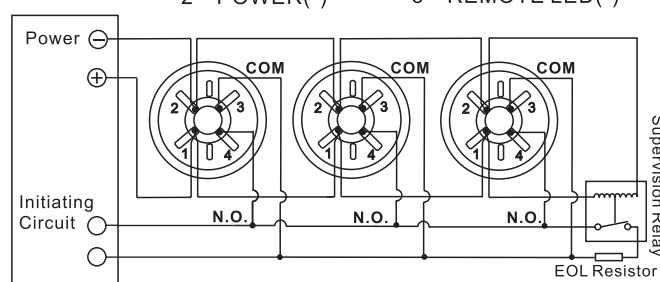

4 wire detectors wiring diagram

- 1 ANODE INPUT
- 2 CATHODE INPUT
- 3 RELAY OUTPUT(COM)
- 4 RELAY OUTPUT(N.O)

## NOTICE

1. The detector can not be installed under worse environment. E.g. coldest, hottest, dusty, do not move away the dustproof cover untill use the detector indeed.
2. Make sure that there is no block within 0.5m from detector.
3. Keep the distance between detector and wall more than 0.5m.
4. Make sure the distance between detectors be less than 15m. And the distance between detector and corner must be less than half of the one between detectors.
5. Horizontally install the detector. If have to be installed slantingly, please keep the angle less than 45 degrees)
6. Detectors base be installed solid , wire connections must be reliable.
7. Recommendations should be carried out every six months a simulated fire test, the test detectors are working properly.
8. For various reason, including, but not limited to changes in environmental conditions, electric disruptions and tampering, the product may not perform as expected. The user is advised to take all necessary precautions for his/her safety and the protection of his/her property.